



COLDBUSTER
floor heating

Tile Heater Kits Catalogue

Comfort Underfoot

COLDBUSTER TILE HEATER KITS

The Coldbuster tile heater is installed directly beneath the tile with an uncomplicated installation process.

Coldbuster tile heating is classified as an appliance and can be installed by any competent person. The heater must be connected to a RCD (safety switch) protected circuit by an electrician. All wiring must conform to AS/NZS 3000:2000 and local wiring regulations.

Kit contents

- Coldbuster tile heater (mounted on self adhesive tape & factory terminated with 2.5m cold tail leads)
- Self adhesive fibreglass mesh
- Klimaguard installation monitor
- Electronic thermostat with programmable timer (air sensing and/or floor limiter)
- Installation guidelines
- 5 Year product guarantee



Size guide & Specifications

Available bathroom floor area sqm	Coldbuster heater kits required	Watt	Amps
1.7 - 2.7	1 x 285W	285	1.19
2.8 - 3.4	1 x 440W	440	1.83
3.5 - 4.6	1 x 570W	570	2.38
4.7 - 5.6	1 x 760W	760	3.17
5.7 - 7.4	1 x 940W	940	3.92
7.5 - 9.2	1 x 1210W	1210	5.04
9.3 - 11.0	1 x 1500W	1500	6.25


Advantages

- No screeds required - the 1mm Coldbuster floor heating element does not affect the floor levels
- Save time on installations as there is no stringing out of heating cables from a roll and measuring spacings between heating cables
- Factory terminated cold tail connections are guaranteed waterproof
- Coldbuster floor heating elements and cold tail heating elements are fully earthed and waterproof and safe for wet areas
- The range of heater sizes and shapes accomodates any room size or shape
- Coldbuster floor heating comply with IEC specifications and carry the CE mark. Coldbuster tile heaters are manufactured under ISO 9001:2000 compliance


Room size sqm	Coldbuster heater kits required	Watt	Amps
4 - 5	1 x 440W	440	1.83
6 - 7	1 x 570W	570	2.38
8 - 9	1 x 760W	760	3.17
10 - 12	1 x 940W	940	3.92
13 - 15	1 x 1210W	1210	5.04
16 - 18	1 x 1500W	1500	6.25
19 - 22	1 x 1210W + 1 x AUR570/16	1780	7.42
23 - 26	1 x 1210W + 1 x AUR940/16	2150	8.96
27 - 29	1 x 1500W + 1 x AUR940/16	2440	10.17
30 - 32	1 x 1500W + 1 x AUR1210/16	2710	11.29
33 - 36	1 x 1500W + 1 x AUR1500/16	3000	12.5
37 - 39	1 x 940W + 2 x AUR1210/16	3360	14
40 - 42	1 x 1210W + 2 x AUR1210/16	3630	15.13
43 - 45	1 x 940W + 2 x AUR1500/16	3940	16.42
46 - 49	1 x 1210W + 2 x AUR1500/16	4210	17.55
50 - 54	1 x 1500W + 2 x AUR1500/16	4500	18.75

Installation


Concrete subfloor

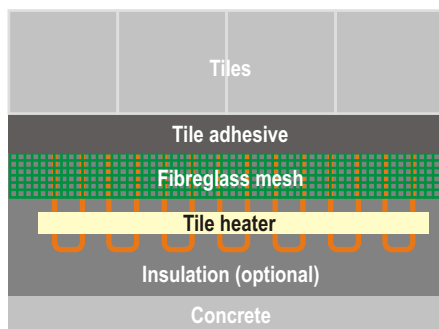

Timber subfloor

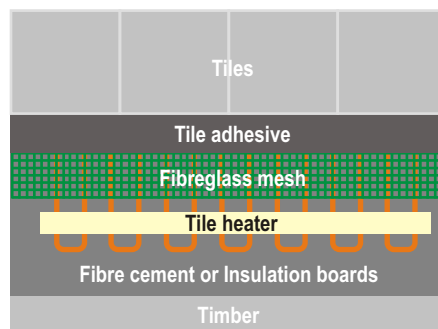

Tefzel coated heating element

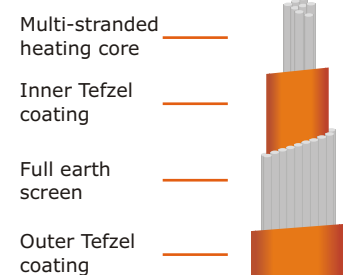

Tefzel coated element
More robust
No corrosion
No maintenance

← 1mm →

Patent No. 92/5937 Tefzel is a trademark of DuPONT

Visit our website for more information. Coldbuster floor heating can be ordered online - custom deliveries are shipped within 24 hours.

AUSTRALIA 1300 653 914
 sales@coldbuster.com.au
 www.coldbuster.com.au

NEW ZEALAND 09 985-3565
 sales@coldbuster.co.nz
 www.coldbuster.co.nz

HEAD OFFICE 2/36 Campbell Avenue, Cromer NSW 2099
 Phone: +61 2 9982 5374 Fax: +61 2 9982 1734 Email: info@coldbuster.com.au